

## Durable Battery Choose CSBattery



### Valve Regulated Long Life GEL Battery

GB12-160G

CSBattery GBG series pure GEL battery is with 12-15 years floating design life, it is ideal for standby or frequent cyclic discharge applications under extreme environments. By adopting thicker grids, high purity 99.997% lead and patented Silicon Gel electrolyte, GBG series offers excellent recovery performance after deep discharge under frequent cyclic discharge use, and can deliver 1200 cycles at 50% DOD even work in hot or cold area. Suitable for Solar, CATV, marine, RV and deep discharge UPS, communication, and telecommunication, etc.

12V  
160Ah  
GEL  
Technology  
Long Life  
Battery



#### Applications


- Telecom Control Equipment
- UPS systems, inverter
- Power Equipment
- Solar & Wind
- Emergency Power Systems

#### General Features

- ✓ 30% more cyclic life through innovation at the PAM additives
- ✓ Long life expectancy of 15 years in floating condition
- ✓ Adopts quality silicon nano gel electrolyte
- ✓ Excellent deep discharge recovery capability
- ✓ Deep cycle performance up to 1200 cycles@50%DOD

#### Dimensions & Weight

Length(mm/inch)	532/20.9
Width(mm/inch)	206/8.11
Height(mm/inch)	216/8.51
Total Height(mm/inch)	222/8.74
Weight(kg/lbs)	49/108.1



#### Technical Specifications

Nominal Voltage		12V6 cells per unit
Design Floating Life @25°C		15 Years
Nominal Capacity @25°C (10 hour rate)(16.0A, 10.8V)		160Ah
Capacity @25°C	20hour rate (8.8A, 10.8V)	177.6Ah
	5 hour rate (28.2A, 10.8V)	166.6Ah
	1 hour rate (116.4A, 9.6V)	106.4Ah
Internal Resistance		Full Charged Battery @25°C
Ambient Temperature	Discharge	-20°C ~ 60°C
	Charge	-10°C ~ 60°C
	Storage	-20°C ~ 60°C
Max Discharge Current @25°C		900A (5s)
Capacity affected by Temperature (10 hour)	40°C	105%
	25°C	100%
	0°C	85%
Self-Discharge @25°C per Month		2%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 40A Voltage 13.6-13.8V
	Cycle Use	Initial Charging Current Less than 40A Voltage 14.4-14.6V

#### Battery Discharge Table

F.V/Time	Discharge Constant Current per Cell (Amperes at 25°C)									
	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	270.1	168.1	120.6	106.4	64.9	47.4	30.5	18.6	16.64	9.24
1.65V	258.9	163.6	117.4	103.6	63.7	46.6	30.1	18.5	16.48	9.15
1.70V	247.6	159.1	114.1	100.7	62.5	45.7	29.7	18.3	16.32	9.06
1.75V	236.4	154.6	110.6	97.0	61.0	44.6	29.2	18.1	16.16	8.97
1.80V	225.1	150.1	107.7	93.0	59.5	43.5	28.8	17.9	16.00	8.88

F.V/Time	Discharge Constant Power per Cell (Watts at 25°C)									
	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	503.8	313.6	224.9	198.5	121.0	88.5	56.9	34.8	31.0	17.2
1.65V	482.8	305.1	218.0	193.2	118.8	86.8	56.1	34.4	30.7	17.1
1.70V	461.8	296.7	212.0	187.9	116.6	85.2	55.3	34.1	30.4	16.9
1.75V	440.8	288.3	206.8	182.6	113.8	83.2	54.5	33.8	30.1	16.7
1.80V	419.8	279.9	200.8	177.2	111.0	81.2	53.7	33.4	29.8	16.6

Note: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery design/specifications are subject to modification without notice. Contact CSBattery for the latest information.

Copyright © 2016 CSBattery, Energy Co., Limited


## Durable Battery Choose CSBattery



### Valve Regulated Long Life GEL Battery

GB12-160G

#### Performance Characteristics

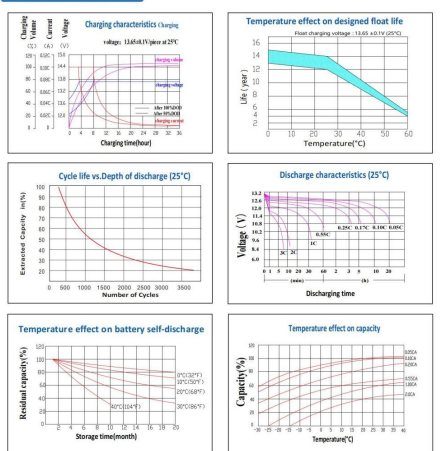

#### Battery Construction

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Si low Cu grid with special paste	Balanced Pb-Cu grid for improved recombination efficiency	Fire resistance ABS (UL94-V0)	Flame Si-Rubber and aging resistance	Female Copper Inset MR	Advanced PVC/JGDM separator for high pressure cell design	Silicon Gel	Two Invers epoxy resin seal

Add: Building Evolution, Xingdong Industry Park, NO.61, Luixian 2nd Road, Baoan, Shenzhen, China.  
Tel: +86-755-29123661 Email: Sales@CSBattery.cn, Support@CSBattery.cn  
Website: [www.CSBattery.cn](http://www.CSBattery.cn)

Copyright © 2016 CSBattery, Energy Co., Limited