

Durable Battery **Choose CSBattery**



Valve Regulated Long Life GEL Battery

GB12-26G

CSBattery GBG series pure GEL battery is with 12-15 years floating design life, it is ideal for standby or frequent cyclic discharge applications under extreme environments. By adopting thicker grids, high purity 99.997% lead and patented Silicon Gel electrolyte, GBG series offers excellent recovery performance after deep discharge under frequent cyclic discharge use, and can deliver 1200 cycles at 50% DOD even work in hot or cold area. Suitable for Solar, CATV, marine, RV and deep discharge UPS, communication, and telecommunication, etc.

12V
26Ah

GEL
Technology

Long Life
Battery



Applications


- Telecom Control Equipment
- UPS systems, Inverter
- Power Equipment
- Solar & Wind
- Emergency Power Systems

General Features

- ✓ 30% more cyclic life through innovation at the PAM additives
- ✓ Long life expectancy of 15 years in floating condition
- ✓ Adopts quality silicon nano gel electrolyte
- ✓ Excellent deep discharge recovery capability
- ✓ Deep cycle performance up to 1200 cycles@50% DOD

Dimensions & Weight

Length (mm/inch)	165/6.50
Width (mm/inch)	176/6.93
Height (mm/inch)	125/4.92
Total Height (mm/inch)	125/4.92
Weight (kg/lbs)(±3%)	5.5/12.1



Technical Specifications

Nominal Voltage		12V6 cells per unit
Design floating life @25°C		12 Years
Nominal Capacity @25°C (10 hour rate @2.60A, 10.8V)		26Ah
Capacity @25°C	20 hour rate (1.44A, 10.8V)	28.8Ah
	5 hour rate (4.80A, 10.5V)	24.6Ah
1 hour rate (17.3A, 9.6V)		17.3Ah
		17.3Ah
Internal Resistance		<131 mΩ
Ambient Temperature	Discharge	-20°C ~ 60°C
	Charge	-10°C ~ 60°C
Max Discharge Current @25°C		<20 C (1.9A/1.9h)
Capacity affected by Temperature (10 hour)	40°C	100%
	25°C	100%
	0°C	85%
Self-Discharge @25°C per Month		2%
		2%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 6.5A Voltage 13.6-13.8V
	Cycle Use	Initial Charging Current Less than 6.5A Voltage 14.4-14.6V

Battery Discharge Table

F.V/Time	Discharge Constant Current per Cell (Ampere) at 25°C										
	15min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	41.9	27.3	19.6	17.3	10.5	7.7	6.6	5.0	3.0	2.70	1.90
1.65V	42.1	26.6	19.1	16.8	10.3	7.6	6.4	4.90	3.05	2.68	1.89
1.70V	40.2	25.9	18.5	16.4	10.2	7.4	6.2	4.85	3.01	2.65	1.87
1.75V	38.4	25.1	18.0	15.9	9.9	7.2	6.0	4.80	2.96	2.63	1.86
1.80V	36.6	24.4	17.3	15.4	9.7	7.1	5.9	4.75	2.93	2.60	1.84

F.V/Time	Discharge Constant Power per Cell (Watts) at 25°C										
	15min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	19.8	10.8	36.5	32.3	19.7	14.4	11.8	9.3	5.65	5.05	3.82
1.65V	28.5	49.6	35.6	31.4	19.3	14.1	11.6	9.1	5.60	5.00	3.81
1.70V	75.0	48.2	34.6	30.5	18.9	13.8	11.4	9.0	5.55	4.95	3.78
1.75V	71.6	46.8	33.6	29.7	18.8	13.5	11.2	8.9	5.50	4.90	3.75
1.80V	68.2	45.5	32.6	28.8	18.0	13.2	11.0	8.7	5.45	4.85	3.72

Note: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery design/specifications are subject to modification without notice. Contact CSBattery for the latest information.

Copyright © 2016 CSBattery, Energy Co., Limited


Durable Battery **Choose CSBattery**



Valve Regulated Long Life GEL Battery

GB12-26G

Performance Characteristics

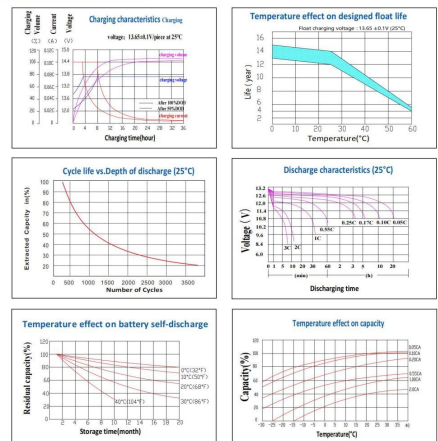

Battery Construction

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Si-Low Cu grid with special paste	Pb-Ca grid for improved recombination efficiency	Fire resistance ABS (UL94-V0)	Flame Si-Rubber and aging resistance	Female Copper Inset MR	Advanced PVC/PPGM separator for high pressure cell design	Silicon Gel	Two Invers epoxy resin seal

Add: Building Evolution, Xingdong Industry Park, NO.61, Luixian 2nd Road, Baoan, Shenzhen, China.
Tel: +86-755-29123661 Email: Sales@CSBattery.cn, Support@CSBattery.cn
Website: www.CSBattery.cn

Copyright © 2016 CSBattery, Energy Co., Limited